


Thank you for choosing Unior! Please find more products and information on Unior bike program on www.unior-bike.com

Hvala ker ste izbrali Unior! Za več informacij o Uniorjevem kolesarskem programu obiščite www.unior-bike.com

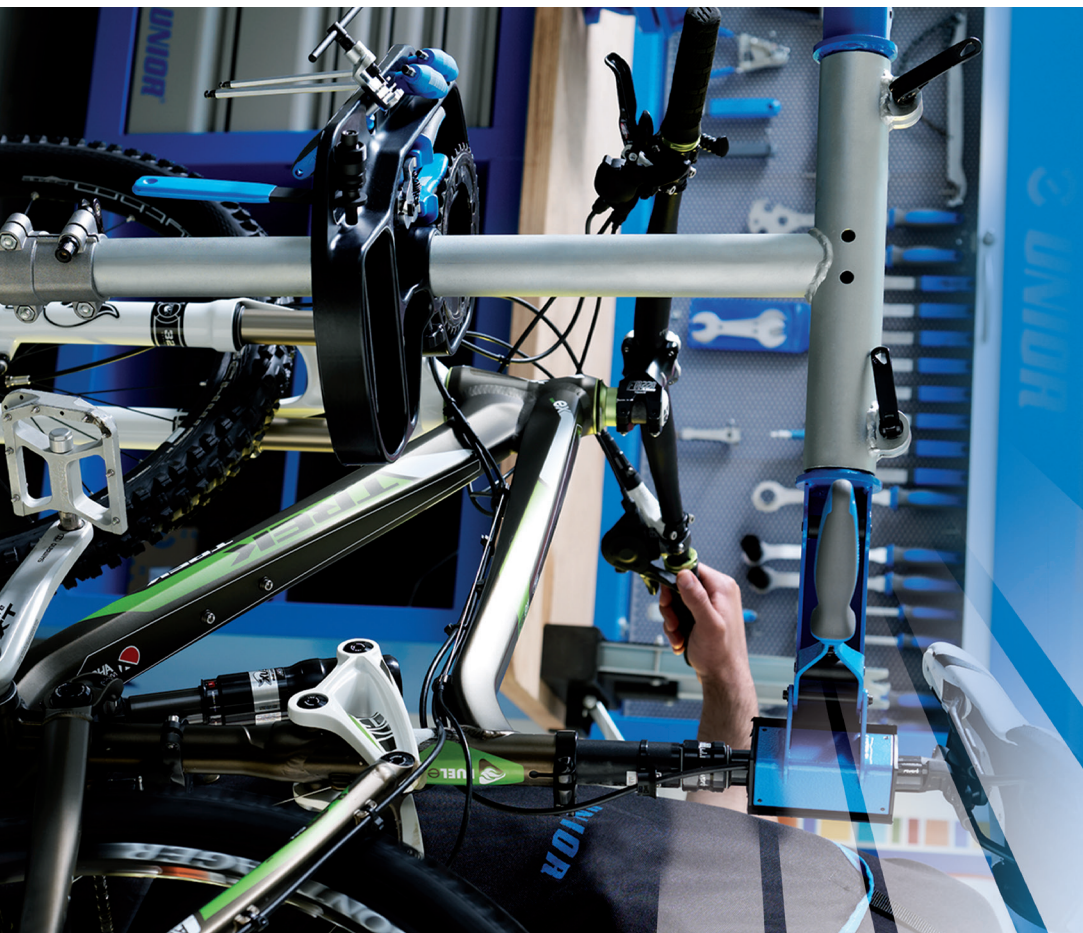

1693

EN

Manual instruction for 1693A, 1693AS, 1693B, 1693B1, 1693BS, 1693BS1, 1693C, 163C1, 1693CS, 1693CS1, 1693CS2, 1693.2, 1693.2S


SLO

Navodila za uporabo artiklov 1693A, 1693AS, 1693B, 1693B1, 1693BS, 1693BS1, 1693C, 163C1, 1693CS, 1693CS1, 1693CS2, 1693.2, 1693.2S



Warning! / Opozorilo!

- Some bike manufacturers recommend not clamping thin-walled carbon fiber frames. Consult manufacturer for suggested clamping location. To avoid damage to the finish, always clean tube before clamping.
- Nekateri proizvajalci koles priporočajo da tanjših karbonskih koles ne vpenjate. Posvetujte se z vašim proizvajalcem koles za pravilno uporabo. Da se izognete poškodbam okvirja kolesa, vedno vstavljajte kolo v čisto celjusi.

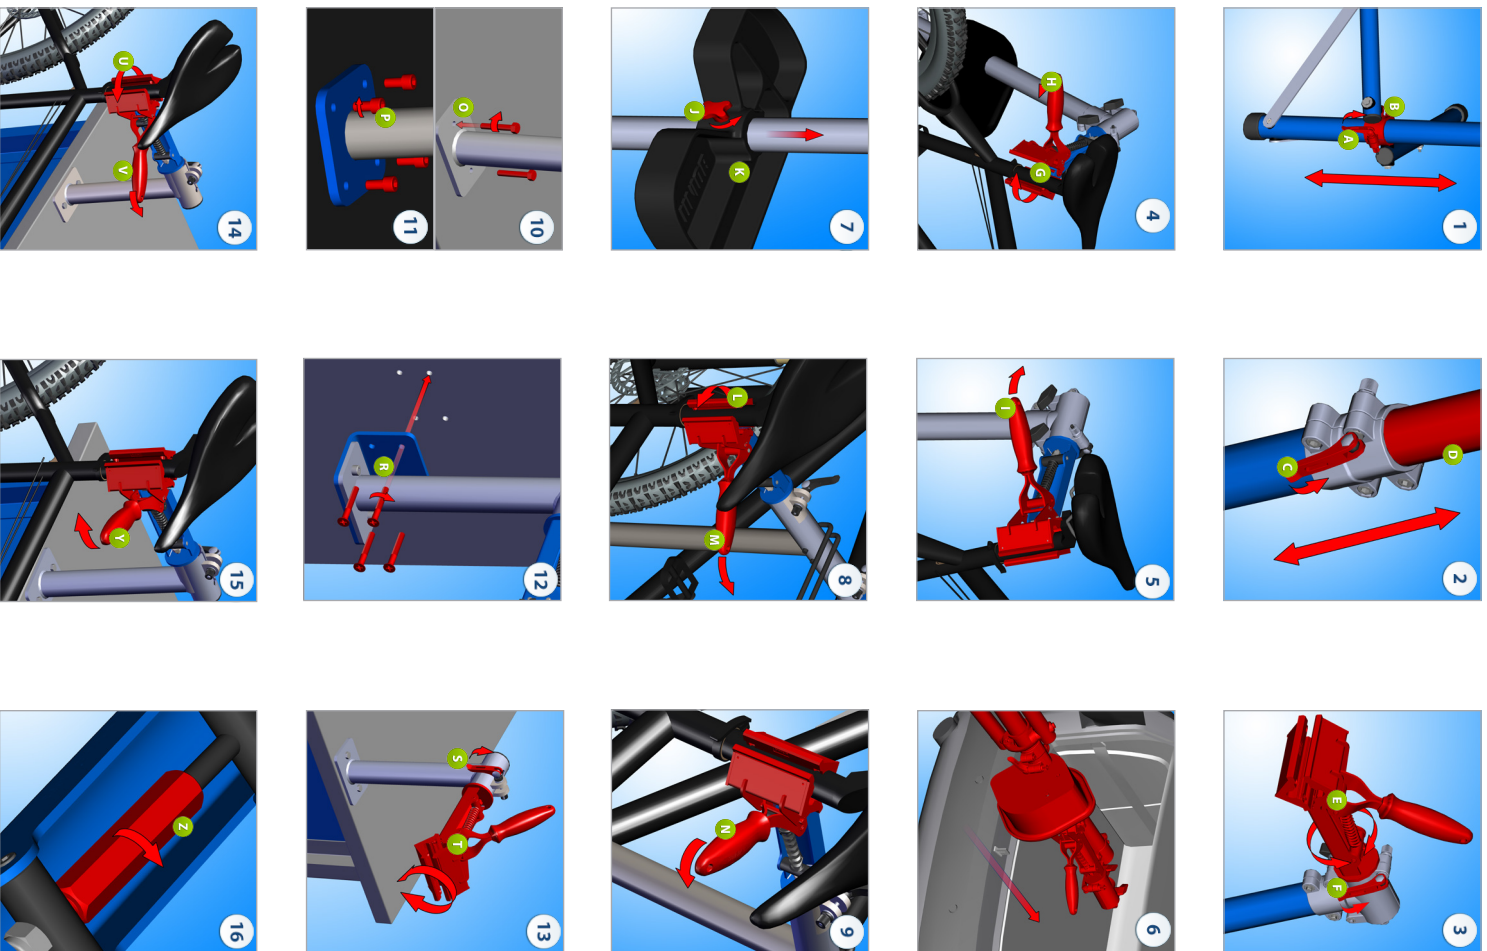

EN

1693A, 1693AS HOW-TO:

Adjust bike stand legs? To adjust the bike stand foldable legs, release lever (1A) and push the slider (1B) in the desired direction.

Adjust bike stand height? To adjust the bike stand height, release the lever (2C) and adjust the top tube (2D).

Adjust jaw angle and clamp bike safety? To adjust the bike stand jaw angle, release lever (3F) and adjust/rotate (3E). Adjust opened jaw (4G) to the seatpost or bike tube. Turn handle (4H) until jaw firmly grabs the tube. To adjust the jaw opening on 1683AS, turn the long screw (16Z) with hand in needed direction as shown on picture 16.

Release bike safety from stand? To release, firmly hold bike frame. Flip handle (5I) to quickly release tube from the jaw.

Adjust foot tray? To adjust the height position of the foot tray (7N), unscrew the nut (7I) and slide the tray to desired position.

Prepare bike stand for transport? For storage/transport, fold bike stand like shown on picture 6.

1693B, 1693B1, 1693BS, 1693BS1 HOW-TO:

Adjust bike stand height? To adjust the bike stand height, release the lever (2C) and adjust the top tube (2D).

Adjust jaw angle and clamp bike safety? To adjust the bike stand jaw angle, release lever (3F) and adjust/rotate (3E). Adjust opened jaw (4G) to the seatpost or bike tube. Turn handle (4H) until jaw firmly grabs the tube. To adjust the jaw opening on 1693BS and 1693BS1, turn the long screw (16Z) with hand in needed direction as shown on picture 16.

Release bike safety from stand? To release, firmly hold bike frame. Flip handle (5I) to quickly release tube from the jaw.

To mount the 1693B without fixed plate to the floor or ceiling, use appropriate screw anchors and screws according to the floor/ceiling material, as shown on picture 11. Screws and screw anchors are not included.

1693C, 1693C1, 1693CS, 1693CS1, 1693CS2 HOW-TO:
Adjust bike stand height? To adjust the bike stand height, release the lever (2C) and adjust the top tube (2D).

Adjust jaw angle and clamp bike safety? To adjust the bike stand jaw angle, release lever (3F) and adjust/rotate (3E). Adjust opened jaw (8L) to seatpost or bike tube. Turn handle (8M) until jaw firmly grabs the tube. To adjust the jaw opening on 1693CS, 1693CS1 and 1693CS2, turn the long screw (16Z) with hand in needed direction as shown on picture 16.

Release bike safety from stand? To release bike safety, firmly hold bike frame. Flip handle (9N) to quickly release tube from the jaw.

To mount the 1693C without fixed plate to the floor or ceiling, use appropriate screw anchors and screws according to the floor/ceiling material, as shown on picture 11. Screws and screw anchors are not included.

1693.2, 1693.2S HOW-TO:

Mount stand on wooden bench? To mount the 1693.2 stand on a wooden bench, prepare the hole with drill size 6 mm and use the attached screws (10O) as shown on picture 10.

Mount stand on wall? To mount the 1693.2 stand to the wall, prepare the holes with drill size 10mm and use attached screw anchors and screws (12R).

Adjust jaw angle and clamp bike safety? To adjust the bike stand jaw angle, release lever (13S) and adjust/rotate (13T). Adjust opened jaw (14U) to seatpost or bike tube. Turn handle (14V) until jaw firmly grabs the tube. To adjust jaw opening on 1693.2S, turn the long screw (16Z) with hand in needed direction as shown on picture 16.

Release bike safety from stand? To release, firmly hold bike frame. Flip handle (15V) to quickly release tube from the jaw.

SLO

1693A, 1693AS IN KAKO:

Montirati noge zloziljivno stojalo? Za nastavljen nog zloziljivno stojalo, odprite zapenilec (1A) in pomirite drsnik (1B) v zeljeni smeri.

Montirati visino stojala? Za nastavljen visine stojala sprosite zapenilec (2C) in nastavite zeljeno visino (2D) stojala.

Montirati kot glave stojala in varno vpeti kolo? Za nastavljen kot glave stojala sprosite zapenilec (3F) in nastavite zeljeno pozicijo (3E) glave. Nastavite odprto celjast (4G) na sedelno oporo ali cev okvirja. Obrnite ročaj (4H) dokler celjast ne zajamejo celotne cevi. Za nastavljen celjast 1693AS, obrnite dolgi vijak (16Z) v zeljeni smeri, kot je to prikazano na sliki 16.

Varno sprostiti kolo iz stojala? Trdno primite okvir kolesa. Obrnite ročaj (5I) za hitro sprostiti cev iz celjasti ovojke.

Montirati odlagalno posodo? Za nastavljen visine posode za noge (7N), odvijte vijak (7I) in nastavite na zeljeno visino.

Prilagoditi stojalo za transport? Za hlaenje/transport stojala za servisiranje koles, zlozite stojalo kot prikazano na sliki 6.

1693B, 1693B1, 1693BS, 1693BS1 IN KAKO:

Montirati visino stojala? Za nastavljen visine stojala sprosite zapenilec (2C) in nastavite zeljeno visino (2D) stojala.

Montirati kot glave stojala in varno vpeti kolo? Za nastavljen kot glave stojala sprosite zapenilec (3F) in nastavite zeljeno pozicijo (3E) glave. Nastavite odprto celjast (4G) na sedelno oporo ali cev okvirja. Obrnite ročaj (4H) dokler celjast ne zajamejo celotne cevi. Za nastavljen celjast 1693BS in 1693BS1, obrnite dolgi vijak (16Z) v zeljeni smeri, kot je to prikazano na sliki 16.

Varno sprostiti kolo iz stojala? Trdno primite okvir kolesa. Obrnite ročaj (5I) za hitro sprostiti cev iz celjasti ovojke.

Za montažo 1693B brez plošče v tla ali strop, uporabite primerno vijake in tanke vložke primerno za material tal/stropa, kot to prikazuje slika 11. Vijaki in vložki niso priloženi.

1693C, 1693C1, 1693CS, 1693CS1, 1693CS2 IN KAKO:
Montirati visino stojala? Za nastavljen visine stojala sprosite zapenilec (2C) in nastavite zeljeno visino (2D) stojala.

Montirati kot glave stojala in varno vpeti kolo? Za nastavljen kot glave stojala sprosite zapenilec (3F) in nastavite zeljeno pozicijo (3E) glave. Nastavite odprto celjast (8L) na sedelno oporo ali cev okvirja. Obrnite ročaj (8M) dokler celjast ne zajamejo celotne cevi. Za nastavljen celjast 1693CS, 1693CS1 ter 1693CS2, obrnite dolgi vijak (16Z) v zeljeni smeri, kot je to prikazano na sliki 16.

Varno sprostiti kolo iz stojala? Trdno primite okvir kolesa. Obrnite ročaj (9N) za hitro sprostiti cev iz celjasti ovojke.

Za montažo 1693C brez plošče v tla ali strop, uporabite primerno vijake in tanke vložke primerno za material tal/stropa, kot to prikazuje slika 11. Vijaki in vložki niso priloženi.

1693.2, 1693.2S IN KAKO:

Montirati stojalo na lesen delovni pulji? Za montažo 1693.2 na lesen pulji, pripravite luknje s svetlobo form in uporabite priložene vijake (10O) kot prikazuje slika 10.

Montirati stojalo na steno? Za montažo stojala 1693.2 na zid, pripravite luknje s svetlobo velikosti 10mm in uporabite priložene stenike vijake in vijake (12R).

Montirati kot glave stojala in varno vpeti kolo? Za nastavljen kot glave stojala sprosite zapenilec (13S) in nastavite zeljeno pozicijo (13T) glave. Nastavite odprto celjast (14U) na sedelno oporo ali cev okvirja. Obrnite ročaj (14V) dokler celjast ne zajamejo celotne cevi. Za nastavljen celjast 1693.2S, obrnite dolgi vijak (16Z) v zeljeni smeri, kot je to prikazano na sliki 16.

Varno sprostiti kolo iz stojala? Trdno primite okvir kolesa. Obrnite ročaj (15V) za hitro sprostiti cev iz celjasti ovojke.